

# Motor Start Capacitor Mounting Hardware and Accessories


## Brackets and Accessories for Motor Start Capacitors, Type PSU

### TYPE TH HORIZONTAL MOUNTING CLIP



Material Thickness TH17 is 0.016"; TH25 is 0.025".

Material: 1050 high carbon steel with phosphate and oil finish. TH25 is 1060.

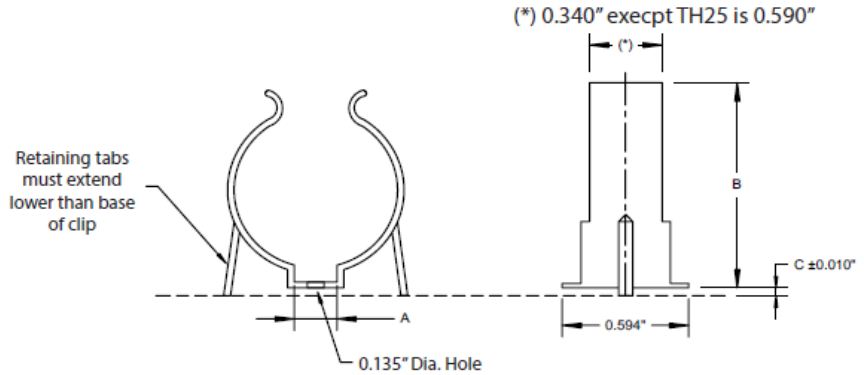


Catalog Part Number	Dimensions in Inches			
	Nominal Dia. of Part to be Mounted	A	B	C
TH17	0.625	0.312	0.720	0.015
TH25	1.375	0.312	1.500	0.030

### TYPE HB BRACKET & ENDCAP

HB BRACKET



PL, PLA End Cap

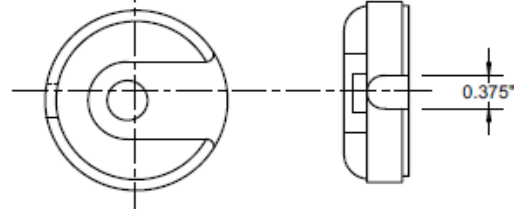

Case Code	Case Dimensions (Inches)		Down Wire Cap	Up Wire Cap	Optional Mounting Bracket
	D	L			
1	1.438	2.750	PL3	PLA3	HB2
2	1.438	3.375	PL3	PLA3	HB4
3	1.438	4.375	PL3	PLA3	HB8
4	1.813	3.375	PL6	PLA6	HB4
5	1.813	4.375	PL6	PLA6	HB8
6	2.063	3.375	PL8	PLA8	HB4
7	2.063	4.375	PL8	PLA8	HB8
8	2.563	4.375	PL10	PLA10	HB8

Order both endcap and bracket for mounting

### ACR15KT Motor Start Resistor Kit



15K Ohm 2 watt bleeder resistors for AC motor start applications. Saves relay switch contacts and capacitor, particularly in capacitor start applications. 1/4" quick connect terminals eliminate need for soldering.

#### ACR15K:

Pack of 10, 15K Ohm 2 watt bleeder resistor without quick connect terminals.

**RoHS Compliant**  
All brackets and hardware are RoHS Compliant