


## Hermetically Sealed Axial Lead Solid Tantalum Capacitors

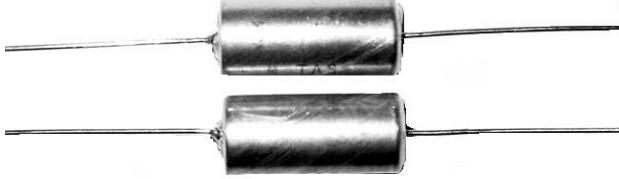

The Type TAS solid tantalum axial lead capacitor is constructed with a rugged hermetically sealed metal case with an outer polyester insulator wrap and is ideal for use in the harsh environments of military and industrial applications. The TAS assures a small case size for high capacitance, and is frequency and temperature stable.

### Highlights

- ◆ Hermetically Sealed
- ◆ High Capacitance
- ◆ Low DC Leakage
- ◆ Low Dissipation Factor
- ◆ Temperature and Frequency Stable
- ◆ Moisture & Solvent Resistant
- ◆ Miniature Size
- ◆ Long Shelf Life

### Specifications

<b>Capacitance Range:</b>	0.0047 $\mu$ F to 330 $\mu$ F
<b>Voltage Range:</b>	6 WVdc to 100 WVdc
<b>Capacitance Tolerance:</b>	$\pm$ 10%, $\pm$ 20%
<b>Operating Temperature:</b>	-55 $^{\circ}$ C to +125 $^{\circ}$ C (With proper derating)

<b>Reverse Voltage (Non-continuous):</b>	15% of rated voltage @ 25 $^{\circ}$ C 5% of rated voltage @ 85 $^{\circ}$ C 1% of rated voltage @ 125 $^{\circ}$ C
--	---

<b>DC Leakage:</b>	At +25 $^{\circ}$ C - (See Ratings) At +85 $^{\circ}$ C - 10 x Ratings limit At +125 $^{\circ}$ C - 12.5 x Ratings limit
--------------------	--


<b><math>\Delta</math> Capacitance Maximum:</b>	-10% @ -55 $^{\circ}$ C +8% @ +85 $^{\circ}$ C +12% @ +125 $^{\circ}$ C
---	---

**Maximum Power Dissipation @ 25  $^{\circ}$ C:**

Case Code	Watts
A	0.090
C	0.100
F	0.125
G	0.180

# Type TAS Solid Tantalum Capacitors

## Outline Drawing

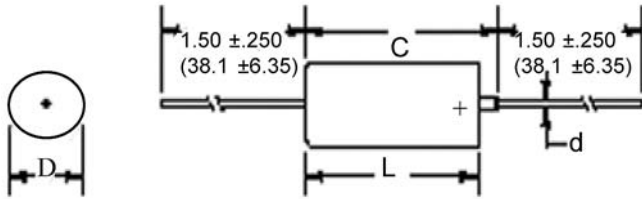

Case Code	Dimensions - Inches (Millimeters)						
	Uninsulated		Insulated		in. (mm)		Quantity Per Reel
	D ±.005 (±.13)	L ±.031 (±.79)	D ±.010 (±.25)	L ±.031 (±.79)	C Maximum	d ±.001 (±.03)	
A	.125(3.18)	.250(6.35)	.135(3.43)	.286(7.26)	.422 (10.72)	.020(.51)	3,500
C	.175(4.45)	.438(11.13)	.185(4.70)	.474(12.04)	.610(15.49)	.020(.51)	2,500
F	.279(7.09)	.650(16.51)	.289(7.34)	.686(17.42)	.822(20.88)	.025(.64)	500
G	.341(8.66)	.750(19.05)	.351(8.92)	.786(19.96)	.922(23.42)	.025(.64)	400

## Part Numbering System

TAS	474	M	035	P	1	A
Series	Capacitance	Tolerance	Voltage	Polar	Mylar Sleeve	Case Code
TAS	472 = 0.0047 $\mu$ F 474 = 0.47 $\mu$ F 105 = 1.0 $\mu$ F 225 = 2.2 $\mu$ F 106 = 10.0 $\mu$ F	J = $\pm$ 5% K = $\pm$ 10% M = $\pm$ 20%	006 = 6 Vdc 035 = 35 Vdc 100 = 100 Vdc	P = Polar	1	A C F G

## Ratings

Cap ( $\mu$ F)	Case Code	Max DCL @ +25 °C ( $\mu$ A)	DF Max @ +25 °C 120 Hz (%)	Catalog Part Number
6 WVdc @ 85 °C 4 WVdc @ 125 °C				
2.2	A	0.3	4	TAS225K006P1A
2.7	A	0.3	4	TAS275K006P1A
3.3	A	0.3	4	TAS335K006P1A
3.9	A	0.3	4	TAS395K006P1A
4.7	A	0.3	4	TAS475K006P1A
5.6	A	0.3	4	TAS565K006P1A
6.8	A	0.3	6	TAS685K006P1A
8.2	C	0.3	6	TAS825K006P1C
10	C	0.3	6	TAS106K006P1C
12	C	0.5	6	TAS126K006P1C
15	C	0.9	6	TAS156K006P1C
18	C	0.9	6	TAS186K006P1C
22	C	0.9	6	TAS226K006P1C
27	C	0.9	6	TAS276K006P1C
33	C	0.9	6	TAS336K006P1C
39	C	0.9	6	TAS396K006P1C
47	C	1.5	6	TAS476K006P1C
56	C	1.5	6	TAS566K006P1C
68	F	3.0	6	TAS686K006P1F
100	F	3.0	6	TAS107K006P1F
120	F	3.0	6	TAS127K006P1F
150	F	4.5	6	TAS157K006P1F
180	F	5.5	6	TAS187K006P1F
220	G	6.0	8	TAS227K006P1G
270	G	6.0	8	TAS277K006P1G
330	G	7.5	8	TAS337K006P1G

Cap ( $\mu$ F)	Case Code	Max DCL @ +25 °C ( $\mu$ A)	DF Max @ +25 °C 120 Hz (%)	Catalog Part Number
10 WVdc @ 85 °C 7 WVdc @ 125 °C				
1.0	A	0.3	3	TAS105K010P1A
1.2	A	0.3	4	TAS125K010P1A
1.5	A	0.3	4	TAS155K010P1A
1.8	A	0.3	4	TAS185K010P1A
2.2	A	0.3	4	TAS225K010P1A
2.7	A	0.3	4	TAS275K010P1A
3.3	A	0.3	4	TAS335K010P1A
3.9	A	0.3	4	TAS395K010P1A
4.7	A	0.4	4	TAS475K010P1A
5.6	C	0.4	4	TAS565K010P1C
6.8	C	1.0	6	TAS685K010P1C
8.2	C	1.0	6	TAS825K010P1C
10	C	1.0	6	TAS106K010P1C
12	C	1.0	6	TAS126K010P1C
15	C	1.0	6	TAS156K010P1C
18	C	1.0	6	TAS186K010P1C
22	C	2.0	6	TAS226K010P1C
27	C	2.0	6	TAS276K010P1C
33	C	2.0	6	TAS336K010P1C
39	C	2.0	6	TAS396K010P1C
47	F	3.0	6	TAS476K010P1F
56	F	3.0	6	TAS566K010P1F
68	F	3.0	6	TAS686K010P1F
100	F	5.0	6	TAS107K010P1F
120	F	5.0	6	TAS127K010P1F
150	G	9.0	6	TAS157K010P1G
180	G	9.0	6	TAS187K010P1G
220	G	10.0	8	TAS227K010P1G

# Type TAS Solid Tantalum Capacitors

Cap ( $\mu$ F)	Case Code	Max DCL @ +25 °C ( $\mu$ A)	DF Max @ +25 °C 120 Hz (%)	Catalog Part Number	Cap ( $\mu$ F)	Case Code	Max DCL @ +25 °C ( $\mu$ A)	DF Max @ +25 °C 120 Hz (%)	Catalog Part Number
<b>15 WVdc @ 85 °C 10 WVdc @ 125 °C</b>					<b>20 WVdc @ 85 °C 13 WVdc @ 125 °C</b>				
0.39	A	0.3	3	TAS394K015P1A	0.39	A	0.3	3	TAS394K020P1A
0.47	A	0.3	3	TAS474K015P1A	0.47	A	0.3	3	TAS474K020P1A
0.56	A	0.3	3	TAS564K015P1A	0.56	A	0.3	3	TAS564K020P1A
0.68	A	0.3	3	TAS684K015P1A	0.68	A	0.3	3	TAS684K020P1A
0.82	A	0.3	3	TAS824K015P1A	0.82	A	0.3	3	TAS824K020P1A
1.0	A	0.3	3	TAS105K015P1A	1.0	A	0.3	3	TAS105K020P1A
1.2	A	0.3	4	TAS125K015P1A	1.2	A	0.3	4	TAS125K020P1A
1.5	A	0.3	4	TAS155K015P1A	1.5	A	0.3	4	TAS155K020P1A
1.8	A	0.3	4	TAS185K015P1A	1.8	A	0.3	4	TAS185K020P1A
2.2	A	0.3	4	TAS225K015P1A	2.2	A	0.4	4	TAS225K020P1A
2.7	A	0.3	4	TAS275K015P1A	2.7	C	0.5	4	TAS275K020P1C
3.3	A	0.4	4	TAS335K015P1A	3.3	C	1.0	4	TAS335K020P1C
3.9	C	0.4	4	TAS395K015P1C	3.9	C	1.0	4	TAS395K020P1C
4.7	C	0.7	4	TAS475K015P1C	4.7	C	1.0	4	TAS475K020P1C
5.6	C	0.7	4	TAS565K015P1C	5.6	C	1.0	4	TAS565K020P1C
6.8	C	0.7	6	TAS685K015P1C	6.8	C	1.0	6	TAS685K020P1C
8.2	C	0.7	6	TAS825K015P1C	8.2	C	1.0	6	TAS825K020P1C
10	C	1	6	TAS106K015P1C	10	C	1.0	6	TAS106K020P1C
12	C	1	6	TAS126K015P1C	12	C	1.0	6	TAS126K020P1C
15	C	2	6	TAS156K015P1C	15	C	2.0	6	TAS156K020P1C
18	C	2	6	TAS186K015P1C	18	F	2.0	6	TAS186K020P1F
22	C	2	6	TAS226K015P1C	22	F	2.5	6	TAS226K020P1F
27	F	3	6	TAS276K015P1F	27	F	2.5	6	TAS276K020P1F
33	F	3	6	TAS336K015P1F	33	F	3.0	6	TAS336K020P1F
39	F	3	6	TAS396K015P1F	39	F	3.0	6	TAS396K020P1F
47	F	4	6	TAS476K015P1F	47	F	4.5	6	TAS476K020P1F
56	F	4	6	TAS566K015P1F	56	G	5.5	6	TAS566K020P1G
68	F	5	6	TAS686K015P1F	68	G	6.0	6	TAS686K020P1G
82	G	6	6	TAS826K015P1G	82	G	6.0	6	TAS826K020P1G
100	G	6	6	TAS107K015P1G	100	G	10.0	6	TAS107K020P1G
120	G	6	6	TAS127K015P1G	<b>35 WVdc @ 85 °C 23 WVdc @ 125 °C</b>				
150	G	8	6	TAS157K015P1G	0.0047	A	0.1	3	TAS472K035P1A
<b>20 WVdc @ 85 °C 13 WVdc @ 125 °C</b>					0.0056	A	0.1	3	TAS562K035P1A
0.047	A	0.1	3	TAS473K020P1A	0.0068	A	0.1	3	TAS682K035P1A
0.056	A	0.1	3	TAS563K020P1A	0.0082	A	0.1	3	TAS822K035P1A
0.068	A	0.1	3	TAS683K020P1A	0.01	A	0.1	3	TAS103K035P1A
0.082	A	0.1	3	TAS823K020P1A	0.012	A	0.1	3	TAS123K035P1A
0.10	A	0.3	3	TAS104K020P1A	0.015	A	0.1	3	TAS153K035P1A
0.12	A	0.3	3	TAS124K020P1A	0.018	A	0.1	3	TAS183K035P1A
0.15	A	0.3	3	TAS154K020P1A	0.022	A	0.1	3	TAS223K035P1A
0.18	A	0.3	3	TAS184K020P1A	0.027	A	0.1	3	TAS273K035P1A
0.22	A	0.3	3	TAS224K020P1A					
0.27	A	0.3	3	TAS274K020P1A					



