


Application Guide, Solid Polymer Aluminum SMT Capacitors

Tape Specifications

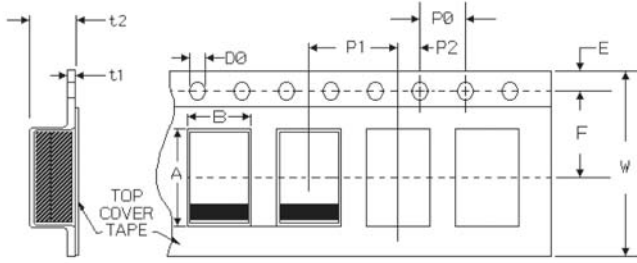


SPA Type	ESRD	ESRE	ESRH	SPA
$t_2 = H + 0.3 \text{ mm} \pm 0.2 \text{ mm}$				

W	E	F	D ⁻	P ₀	P ₁	P ₂	A	B	t ₁
±0.3			+0.1/-0.0		±0.2		±0.2	±0.2	
12.0	1.8	5.5	1.5	4.0	8.0	2.0	7.7	4.6	0.4

Tol.: ± mm unless otherwise specified

Reel Specifications

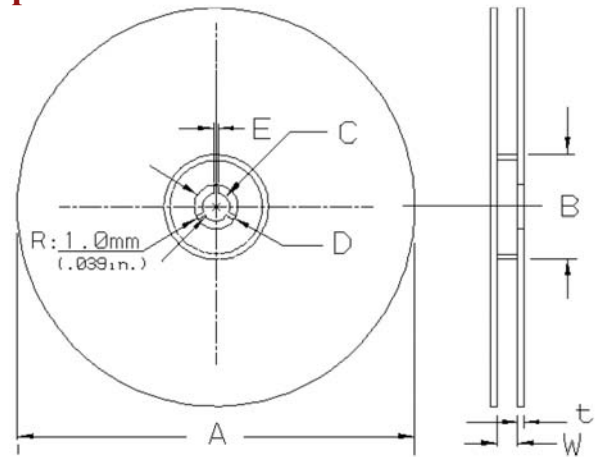


A ±0.2	B Min.	C ±0.5	D ±0.8	E ±0.5	W ±1.0	t
333.0	50.0	13.0	21.0	2.0	14.0	3.0

Design Kits



Design kits containing various ratings are available through the CDE web site.

Typical Temperature Characteristics




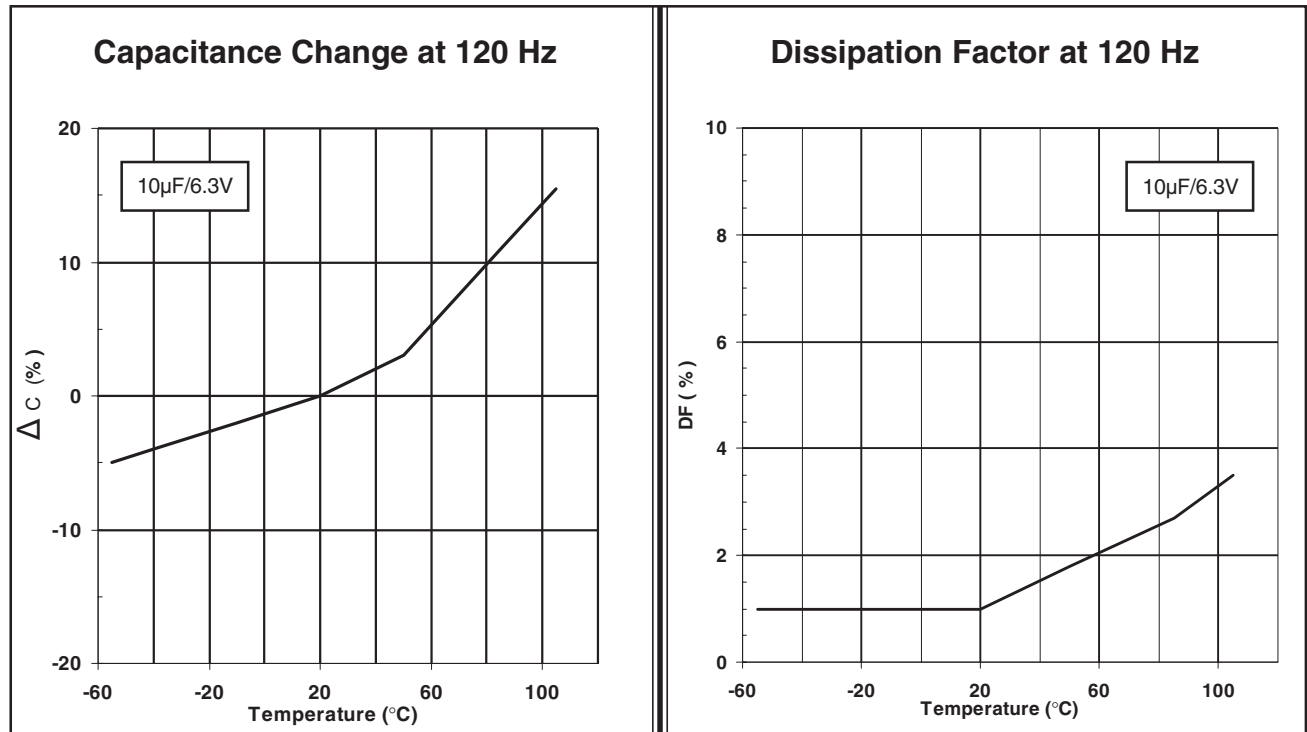


Application Guide, Solid Polymer Aluminum SMT Capacitors

Typical Impedance and Equivalent Series Resistance

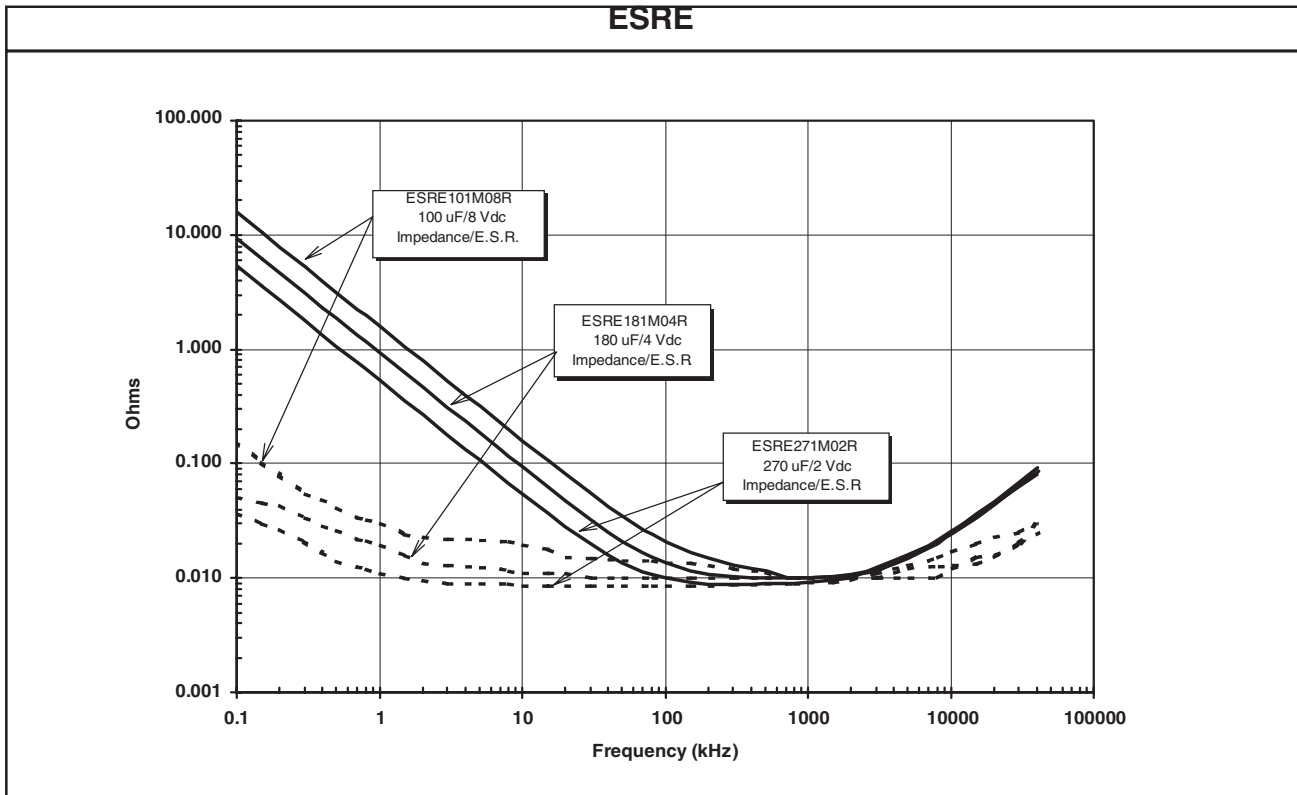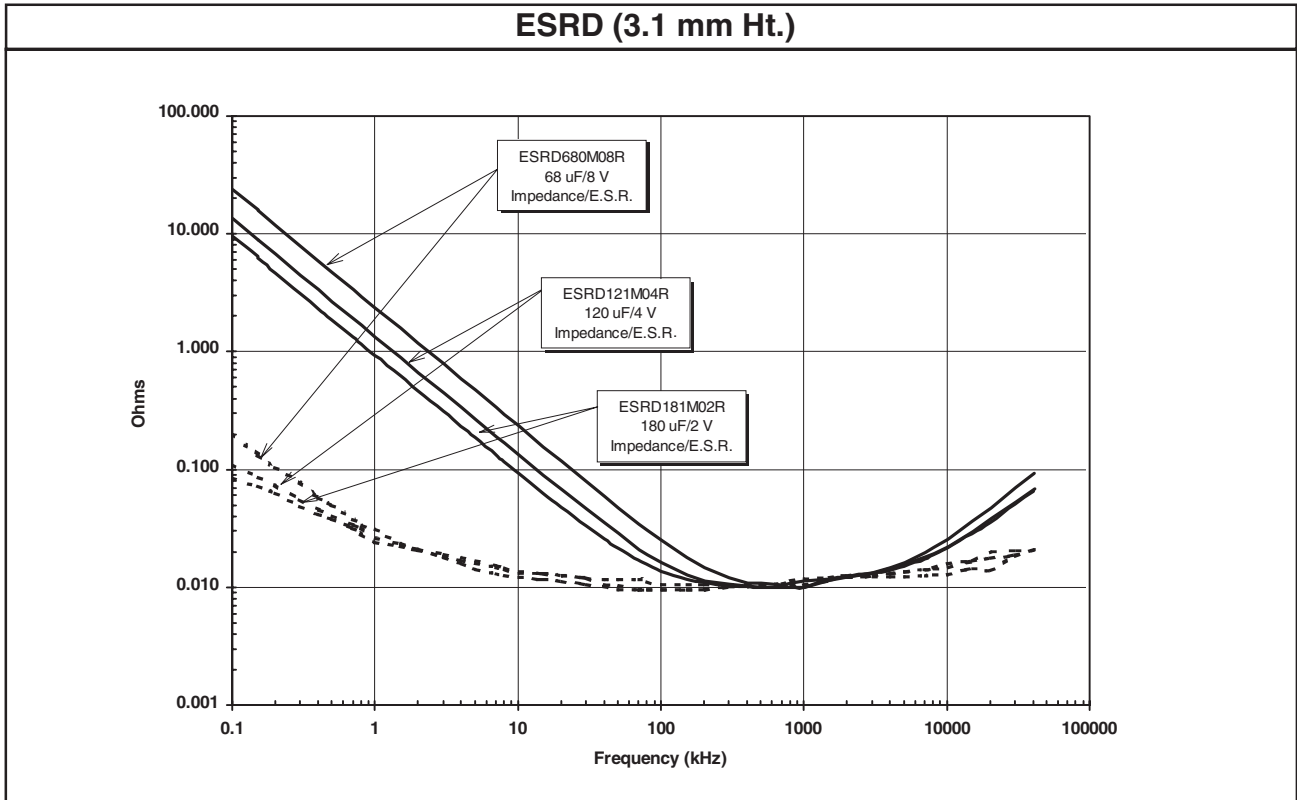


Typical Impedance and Equivalent Series Resistance

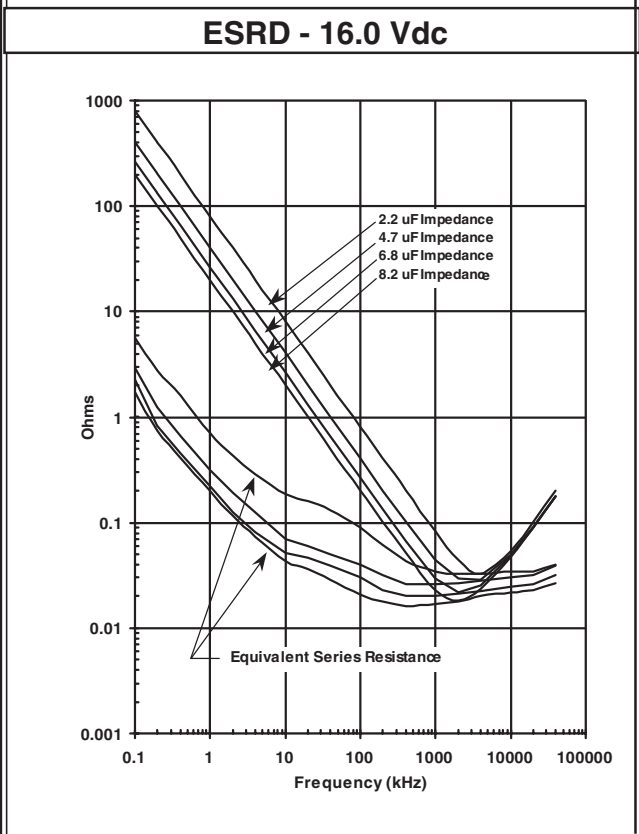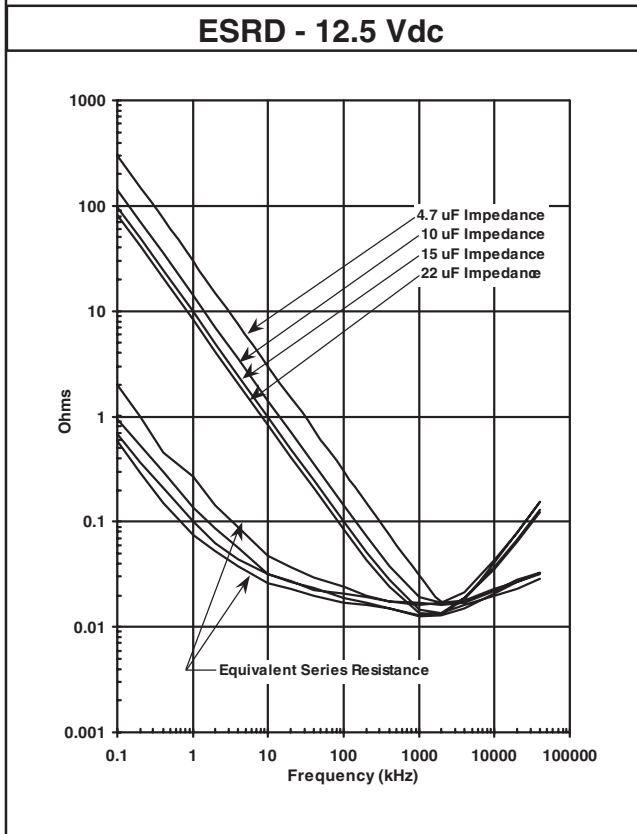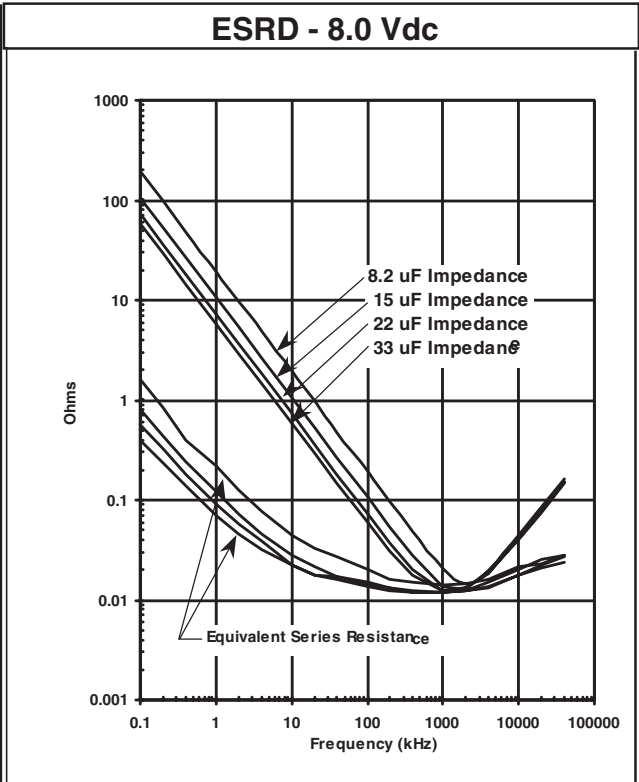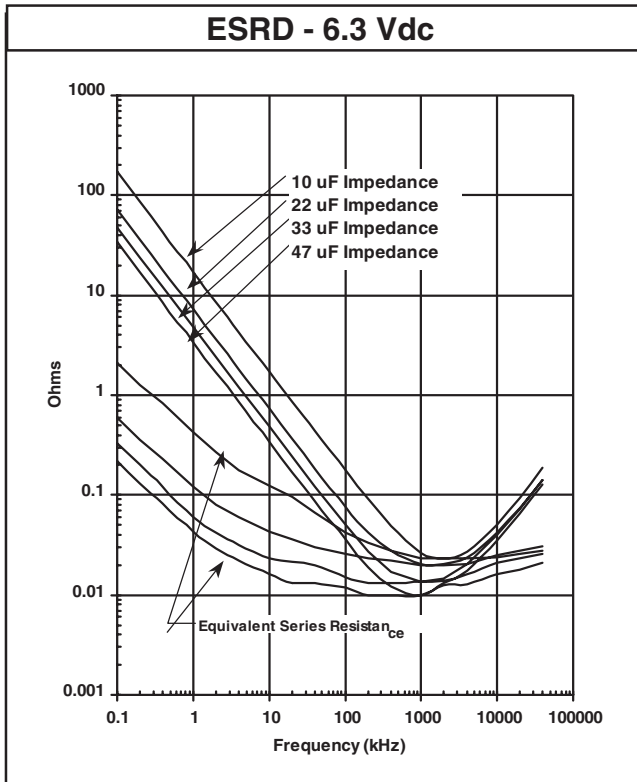


Application Guide, Solid Polymer Aluminum SMT Capacitors

Typical Temperature Characteristics


Impedance at 100 kHz

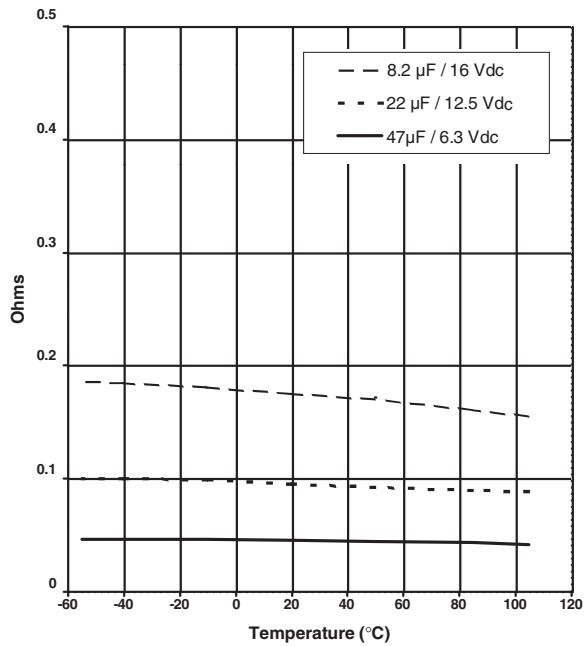


E.S.R. at 100 kHz

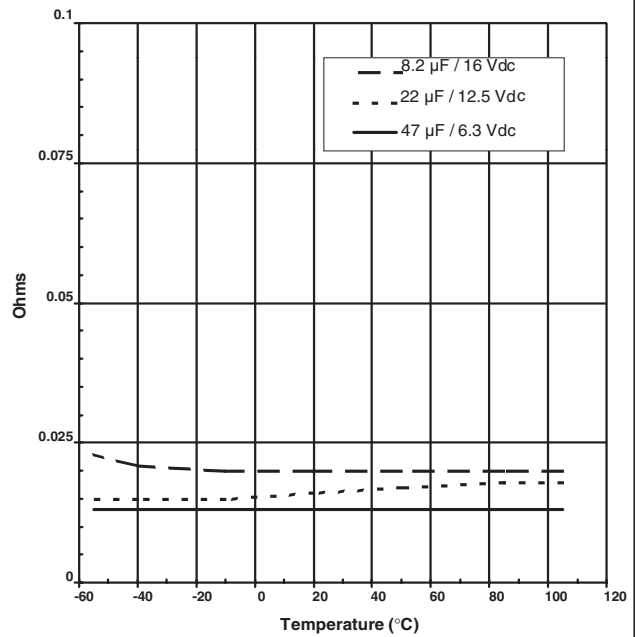

Impedance at 400 kHz

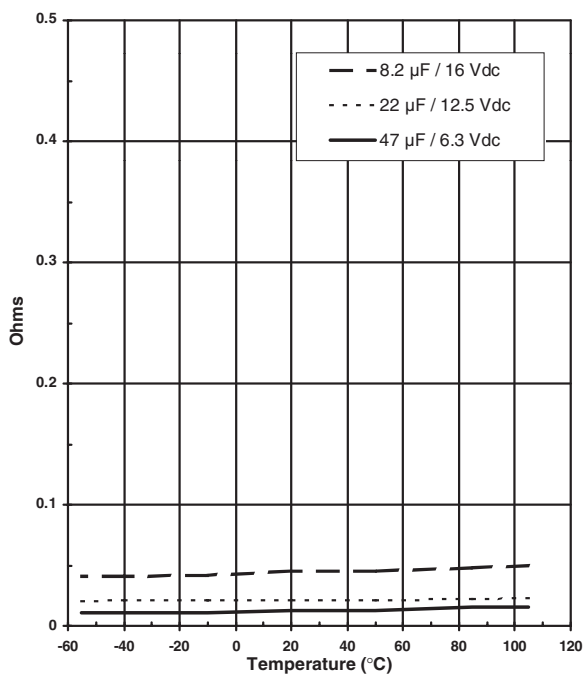


E.S.R. at 400 kHz

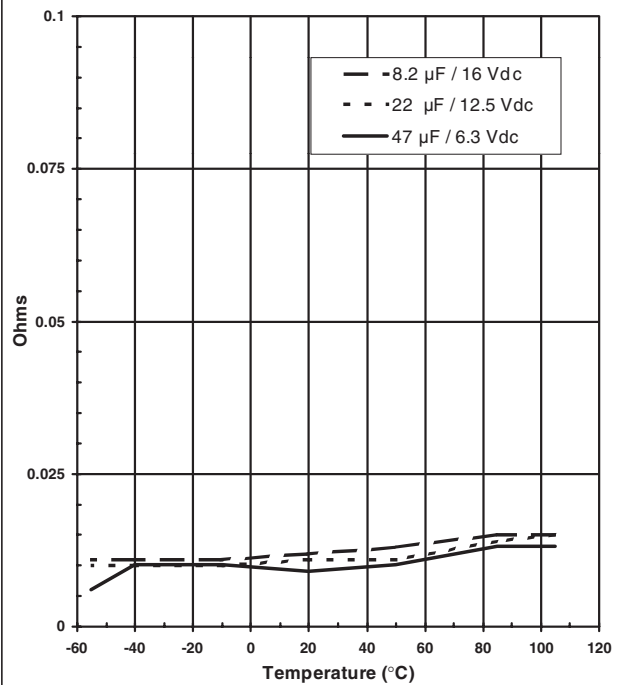

Application Guide, Solid Polymer Aluminum SMT Capacitors



Life Expectancy

Life Expectancy vs Temperature and Relative Humidity

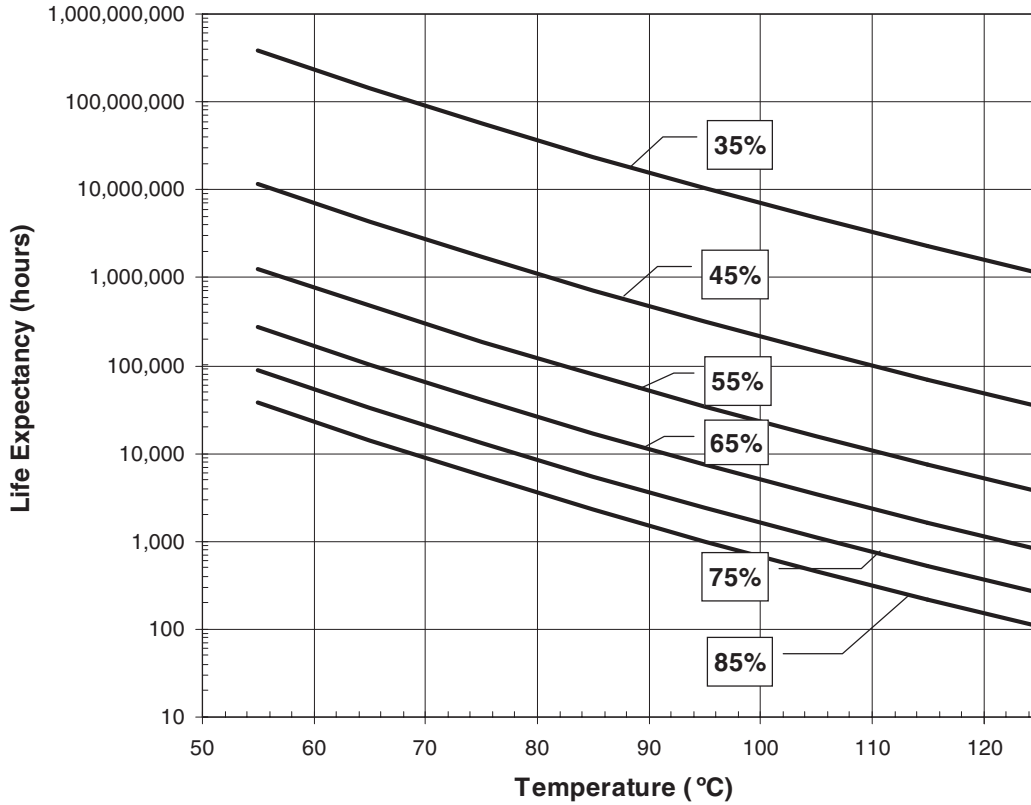

Note: Failure limit is 100% impedance increase at 400 kHz.

Endurance Test Data

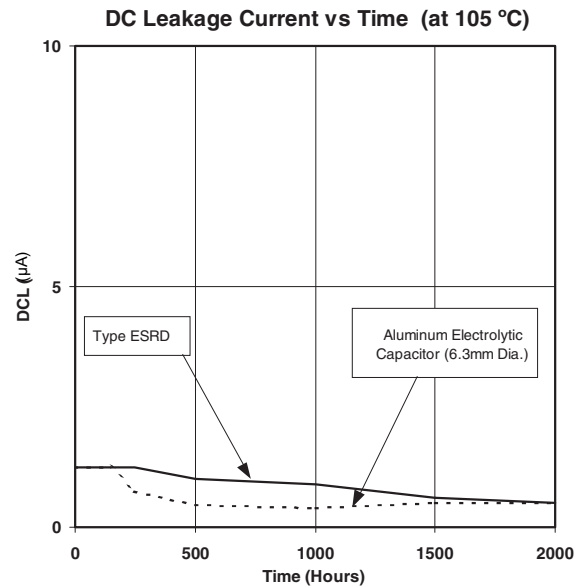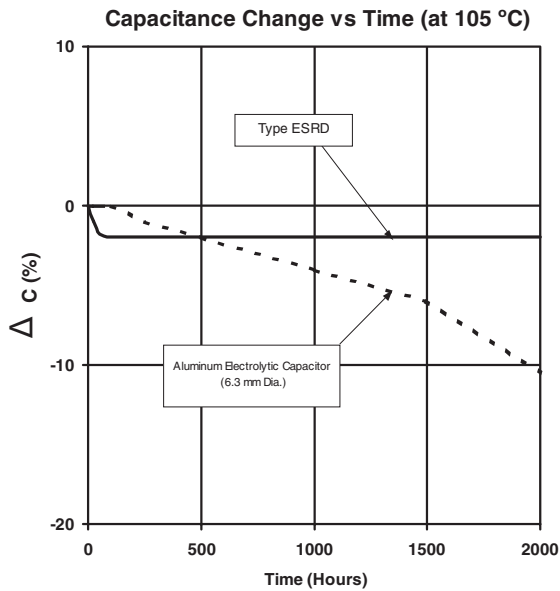

Application Guide, Solid Polymer Aluminum SMT Capacitors

Application Notes

Rated Voltage

This is the maximum voltage that the capacitor has been designed to withstand continuously at rated temperature. Solid polymer aluminum capacitors are quite rugged and may be operated continuously at rated voltage. Voltage derating does not significantly increase the life expectancy of the capacitor. At voltage levels equal to or less than rated voltage, the capacitor will not short circuit (even at end of life). In fact it can self heal. A polymer aluminum capacitor can be operated over a lifetime at full rated voltage without worry of short circuiting. However, if subjected to sufficient over voltage or reverse voltage, a SPA capacitor can fail short circuit.

Ripple Current/Ripple Voltage

AC voltage as part of the capacitor's DC bias voltage will cause current to flow through the capacitor. This ripple current flows through the capacitor's equivalent series resistance generating heat. The heat increases the capacitor's internal temperature. Exceeding the specific maximum ripple current will overheat the capacitor. The maximum ripple current ratings are given in the ratings

tables. Peaks of the AC ripple voltage should not exceed the rated voltage or cause voltage reversal temperature. Exceeding the specified maximum ripple current will overheat and damage the capacitor. The maximum ripple current ratings are given in the ratings tables.


Shelf Life

When stored at room temperature, in low humidity, and out of direct sunlight, SPA capacitors have a storage life of 5 to 10 years. Storage at high humidity over long periods of time can cause the DC leakage current to increase. However, the application of rated voltage will reduce the DC leakage current to normal limits.

Reverse Voltage

SPA capacitors are polarized and are not intended to be used with reversed voltage. They can withstand reverse voltage pulses or transients up to 20% of the rated voltage, and they are capable of operating with up to 10% of the rated voltage when reverse voltage is applied continuously.



Temperature Rise from Ripple Current
(47 μ F/6.3 Vdc)

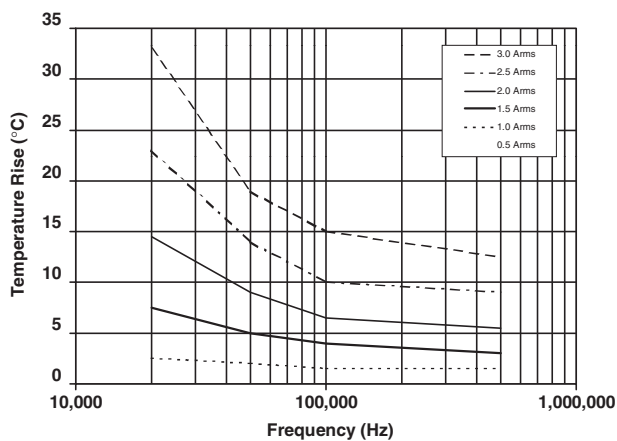

Ripple Current Frequency Multipliers							
Frequency (kHz)	10	20	50	100	250	500	1000
Frequency Multipliers for Sine Wave Current +20 to +105 °C	0.6	0.7	0.8	1.0	1.1	1.2	1.3

Application Guide, Solid Polymer Aluminum SMT Capacitors

Recommended Circuit Board Mounting Pads

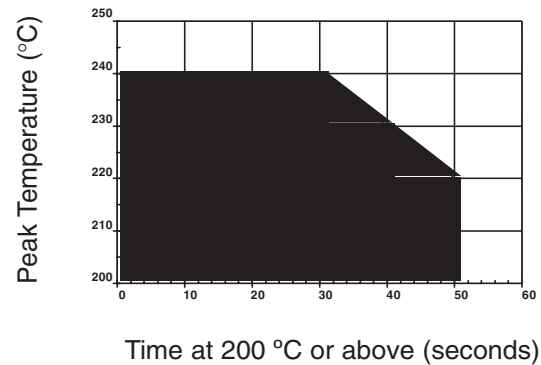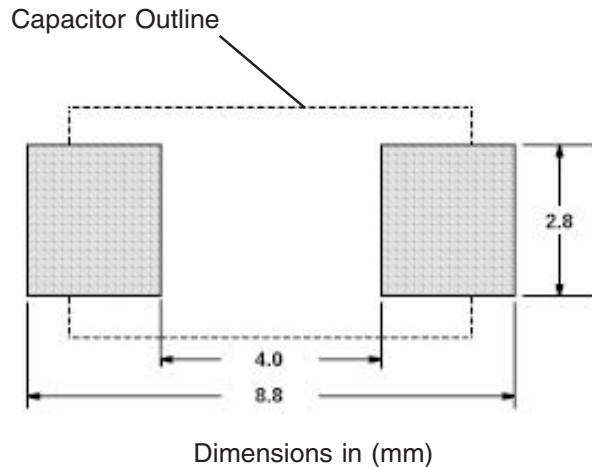


Reclamation

The resin case of a capacitor can be damaged by the heat stress of soldering if it has absorbed excessive moisture. Capacitors suspected of having been exposed to high humidity can be reclaimed by placing them in an oven at 50 °C for 100 hours.

Reflow Soldering

The following graph gives the maximum recommended capacitor surface temperature during reflow soldering.

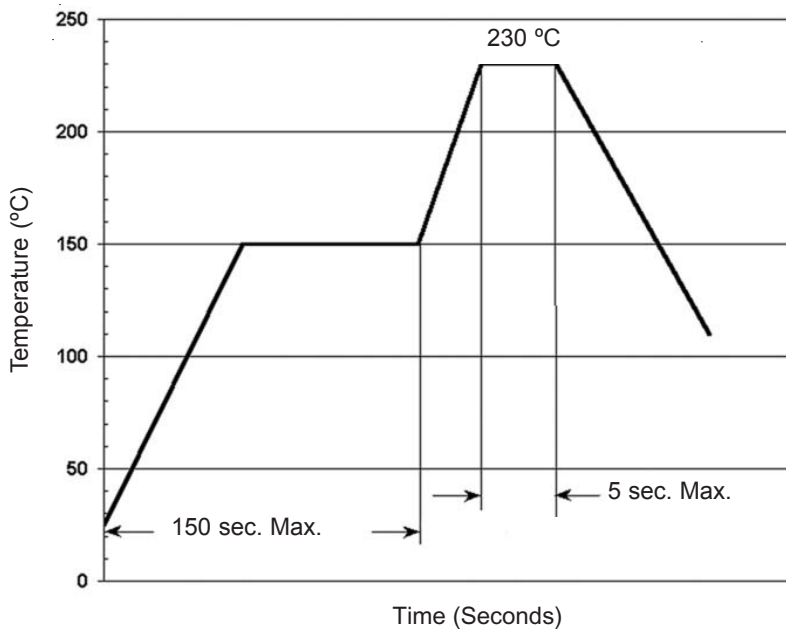

See chart, at top right, for Time at 200 °C or above

Heat Stress while Soldering

DC leakage current can increase after soldering, but it will return to the initial level after applying voltage. When using a soldering iron to mount the capacitor, the iron should have a maximum temperature of 350°C and soldering should not exceed 10 seconds.

Cleaning

The capacitors can withstand for 5 minutes at 60 °C the following cleaning solvents by dipping or ultrasonic methods:

- Pine Alpha ST-100S
- Sunelec B-12
- DK Be-Clear CW-5790
- Aqua Cleaner 210SEP
- Cold Cleaner P3-375
- Telpen Cleaner EC-7R
- Clean-Thru 750H, 750L, and 710M
- Techno-Cleaner 219
- Techno-Care FRW-1, FRW-17, & FRV-1

After cleaning, wash the circuit board with water for about 3 minutes, and dry at 100 °C for 20 minutes.

Application Guide, Solid Polymer Aluminum SMT Capacitors

Up to 50 Years Life

SPA SMT capacitors are polarized, aluminum capacitors which use a highly conductive solid polymer as the electrolyte. They have reliability advantages over both aluminum and solid tantalum electrolytic capacitors. Unlike aluminum capacitors, there is no liquid electrolyte that can evaporate and cause a failure. Unlike solid

tantalum which can fail short and burn, SPA capacitors gradually become open circuits after 25 to 50 years operation.

Life expectancy curves show 200,000 hours expected life at full rated voltage and normal ambient conditions.

Ultra Low E.S.R. and High Rippled Current Capability

The equivalent series resistance (e.s.r.) of solid polymer aluminum capacitors is much lower than the e.s.r. of solid tantalum capacitors. This results in a much higher ripple current handling capability. The e.s.r. is even lower than the new tantalum polymer hybrid capacitors. SPA's ultra-low resistance magic is in the solid conductive polymer.

The series resistance of electrolytic capacitors is largely determined by the resistivity of the electrolyte. Because the resistivity of SPA's polymer electrolyte is several orders of magnitude less than that of other electrolytes, the equivalent series resistance is almost zero.

Construction



Construction is a unique combination of the elements of aluminum electrolytic and solid tantalum capacitors.

Like conventional aluminum electrolytic capacitors, the anode in SPA capacitors is an aluminum plate on which an aluminum oxide layer has been built up by an electrolysis process. The aluminum oxide serves as the dielectric in both SPA and conventional aluminum electrolytics.


The dielectric in solid tantalum capacitors is tantalum

pentoxide which is built upon a tantalum pellet anode. A highly conductive polymer electrolyte film is deposited over the aluminum oxide dielectric in SPA capacitors. Carbon and silver paint are used to finish the capacitor's cathode. This is similar to what is used in solid tantalum capacitors, where manganese dioxide is used as the electrolyte.


The capacitor element is encased in a molded resin that is capable of meeting the UL-94, V0 flammability rating. The terminals are solder coated copper clad steel.

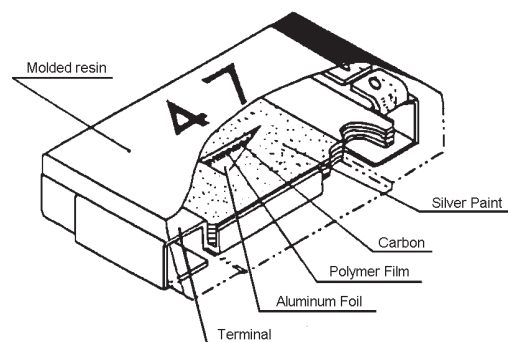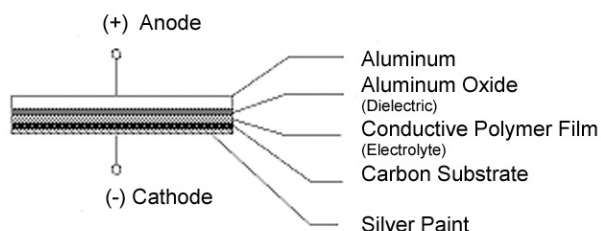

SPA Compared to Other Electrolytics

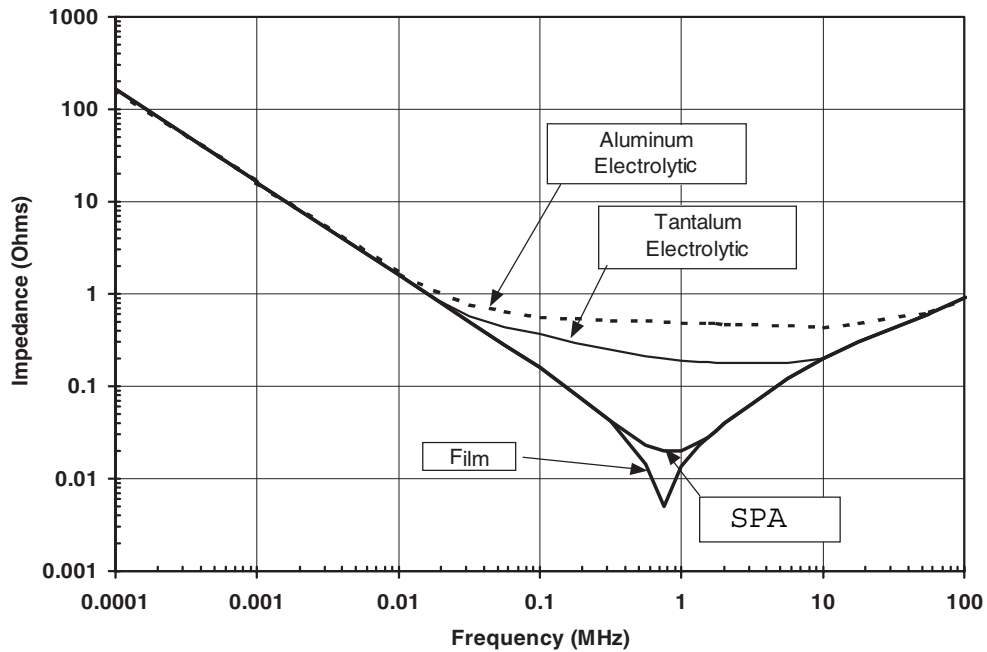


SPA capacitors have lower impedance at high frequencies than the same values of wet electrolyte aluminum capacitors and solid tantalum capacitors.

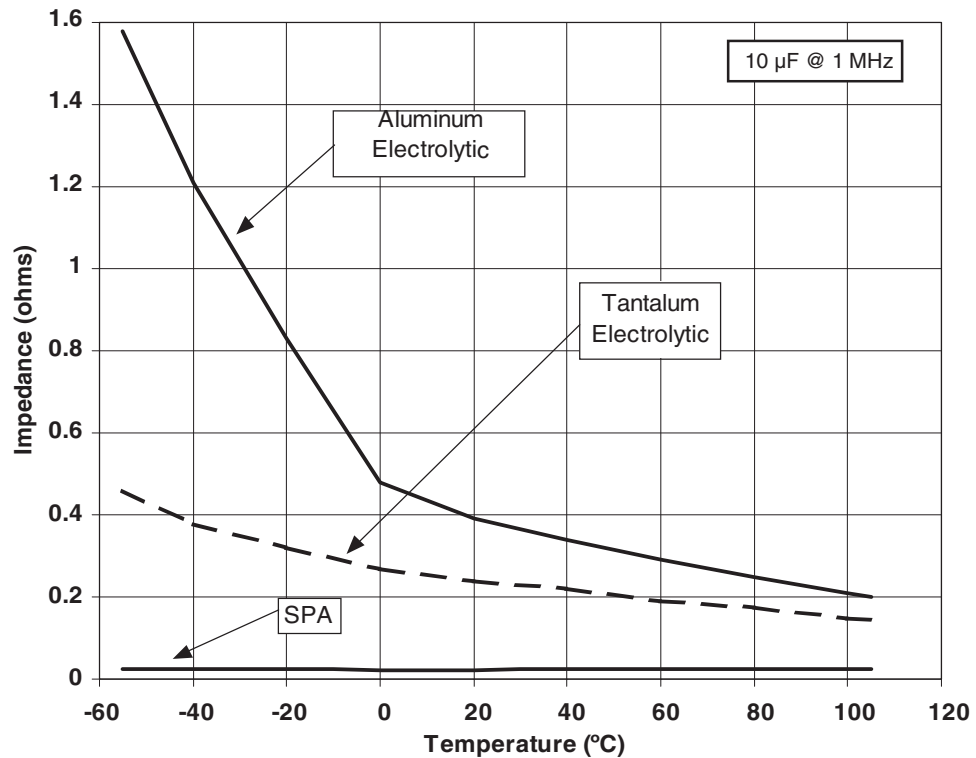

SPA capacitors have stable impedance over the entire temperature range.

Application Guide, Solid Polymer Aluminum SMT Capacitors


SPA vs Solid Tantalum

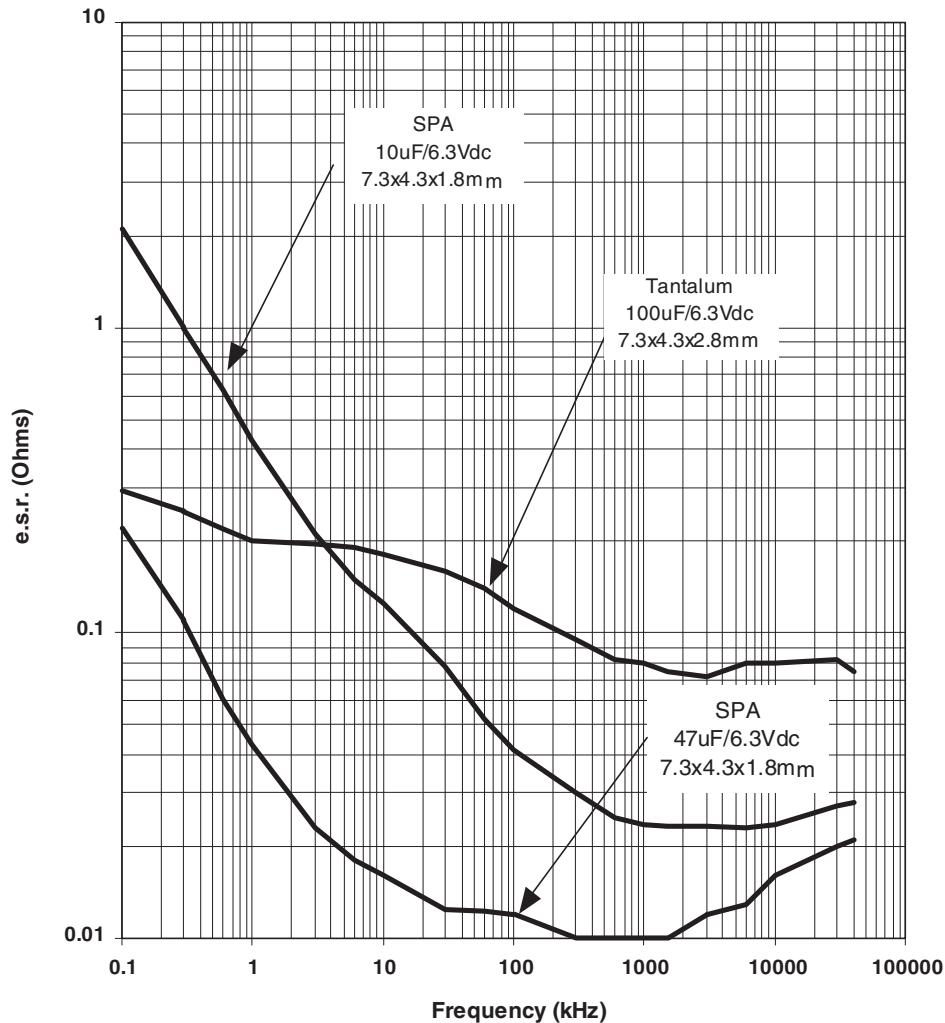


Frequency	100 μ F Tantalum Capacitor		47 μ F Solid Polymer Aluminum Electrolytic Capacitor	
	Equivalent Series Resistance	Impedance Magnitude Z	Equivalent Series Resistance	Impedance Magnitude Z
	(Ω)	(Ω)	(Ω)	(Ω)
100.0 kHz	0.12	0.12	0.012	0.035
1.0 MHz	0.08	0.08	0.010	0.010
100.0 Mhz	0.08	0.19	0.016	0.035

At 1 MHz the Solid Polymer Aluminum capacitor will provide almost 8 times more ripple and noise attenuation (.08/.01) as compared to the tantalum capacitor.

SPA vs Solid Tantalum-Polymer Hybrid

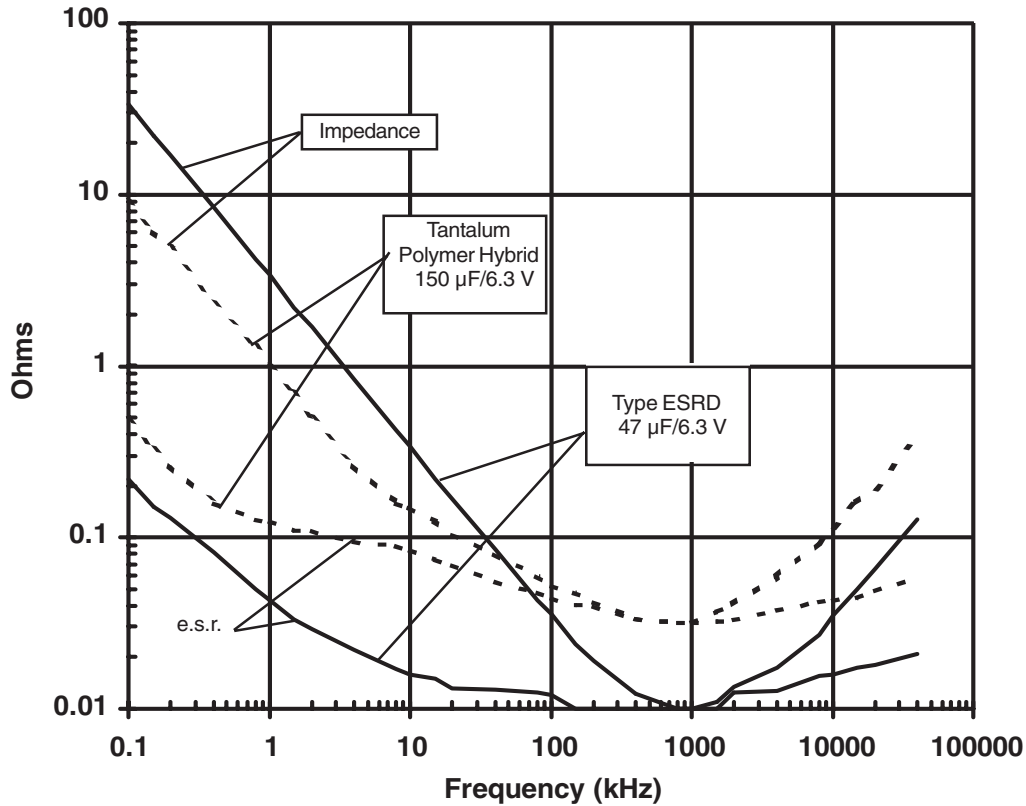

Type ESRD's impedance and equivalent series resistance are lower at high frequencies than that of tantalum-polymer hybrid type capacitors.

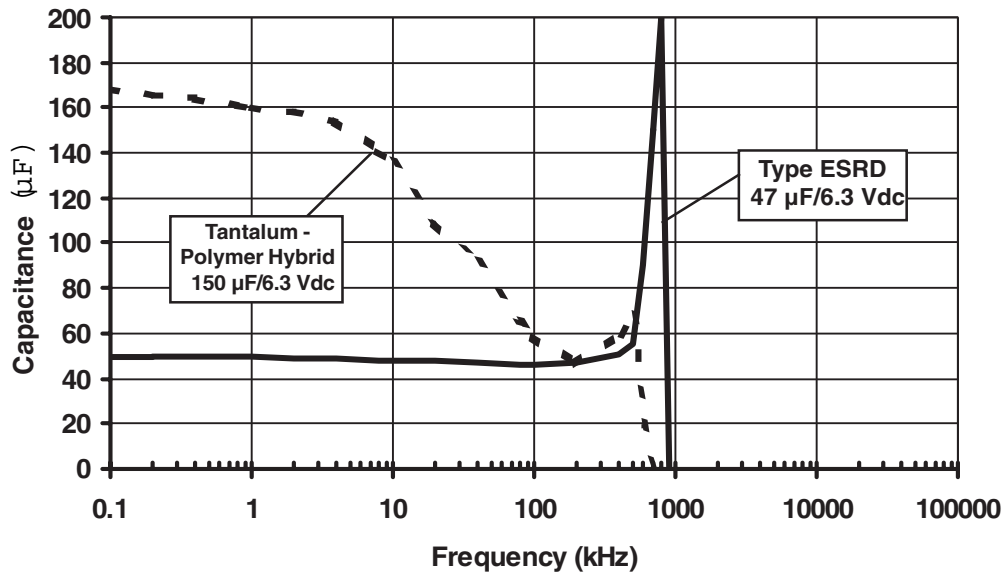

Note the capacitance roll off of the tantalum-polymer capacitor at high frequencies. The tantalum-polymer capacitor loses approximately 2/3 of its capacitance at 100 kHz.

Notice and Disclaimer: All product drawings, descriptions, specifications, statements, information and data (collectively, the "Information") in this datasheet or other publication are subject to change. The customer is responsible for checking, confirming and verifying the extent to which the Information contained in this datasheet or other publication is applicable to an order at the time the order is placed. All Information given herein is believed to be accurate and reliable, but it is presented without any guarantee, warranty, representation or responsibility of any kind, expressed or implied. Statements of suitability for certain applications are based on the knowledge that the Cornell Dubilier company providing such statements ("Cornell Dubilier") has of operating conditions that such Cornell Dubilier company regards as typical for such applications, but are not intended to constitute any guarantee, warranty or representation regarding any such matter – and Cornell Dubilier specifically and expressly disclaims any guarantee, warranty or representation concerning the suitability for a specific customer application, use, storage, transportation, or operating environment. The Information is intended for use only by customers who have the requisite experience and capability to determine the correct products for their application. Any technical advice inferred from this Information or otherwise provided by Cornell Dubilier with reference to the use of any Cornell Dubilier products is given gratis (unless otherwise specified by Cornell Dubilier), and Cornell Dubilier assumes no obligation or liability for the advice given or results obtained. Although Cornell Dubilier strives to apply the most stringent quality and safety standards regarding the design and manufacturing of its products, in light of the current state of the art, isolated component failures may still occur. Accordingly, customer applications which require a high degree of reliability or safety should employ suitable designs or other safeguards (such as installation of protective circuitry or redundancies or other appropriate protective measures) in order to ensure that the failure of an electrical component does not result in a risk of personal injury or property damage. Although all product-related warnings, cautions and notes must be observed, the customer should not assume that all safety measures are indicated in such warnings, cautions and notes, or that other safety measures may not be required.