


Type CSR21 (MIL-C-39003/09) Solid Tantalum Capacitors

125 °C, Hermetically Sealed, Axial Leaded, Solid Tantalum Capaci-



Type CSR21 (MIL-C-39003/09) military grade, axial leaded, solid tantalum capacitors are hermetically sealed for rugged environmental applications. They have a very low ESR and are great for high frequency applications.

Outline Drawing

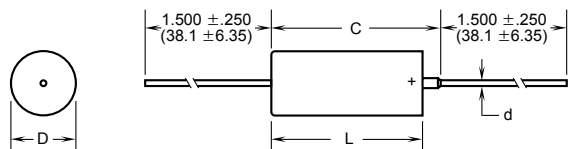

Highlights

- Very Low ESR
- High Frequency Operation
- Hermetically Sealed
- Graded Failure Rates
- Low DC Leakage
- Temperature Stable
- Frequency Stable

Specifications

Capacitance Range: 5.6 to 330 μ F
Voltage Range: 6 to 50 WVdc at +85 °C; 4 to 33 WVdc at 125 °C
Capacitance Tolerance: \pm 10%, \pm 20%, (\pm 5% by special order)
Operating Temperature Range: -55 to +125 °C

Reverse Voltage (Non-continuous) 15% of rated voltage @ +25 °C
 5% of rated voltage @ +85 °C
 1% of rated voltage @ +125 °C

DC Leakage: At +25 °C – See ratings limit
 At +85 °C – 10 x ratings limit
 At +125 °C – 12.5 x ratings limit

Capacitance Change Maximum: -10% @ -55°C
 +8% @ +85 °C
 +12% @ +125 °C

Case Sizes

Case Code	Uninsulated		Insulated		C Maximum	d \pm .001 (\pm .03)	Quantity Per Reel
	D \pm .005 (\pm .13)	L \pm .031 (\pm .79)	D \pm .010 (\pm .25)	L \pm .031 (\pm .79)			
C	.279 (7.09)	.650 (16.51)	.289 (7.34)	.686 (17.42)	.822 (20.88)	.025 (.64)	500
D	.341 (8.66)	.750 (19.05)	.351 (8.92)	.786 (19.96)	.922 (23.42)	.025 (.64)	400

Type CSR21 (MIL-C-39003/09) Solid Tantalum Capacitors

Ratings

Cap Cap (µF)	Cap Tol. ± (%)	Case Code	Max DCL @ 25 °C (µA)	Max. DF @ 25 °C 120 Hz (%)	Max ESR @ 100 kHz +25 °C (Ω)	Max Ripple @ 40 kHz +25 °C (A rms)	MIL-C-39003/9 (CSR 21) Dash Numbers						
							Exponential Failure Rate (% per 1000 hours)				Weibull Failure Rate (% per 1000 hours)		
							'M' Level (1.0)	'P' Level (.10)	'R' Level (.01)	'S' Level (.001)	'B' Level (.10)	'C' Level (.01)	'D' Level (.001)
6 WVdc @ 85 °C — 4 WVdc @ 125 °C													
150	10	C	4.5	10	0.065	3.3	2	102	202	302	2002	3002	4002
150	20	C	4.5	10	0.065	3.3	3	103	203	303	2003	3003	4003
180	10	C	5.5	10	0.060	3.4	5	105	205	305	2005	3005	4005
270	10	D	6.5	10	0.050	4.1	7	107	207	307	2007	3007	4007
330	10	D	7.5	12	0.045	4.3	9	109	209	309	2009	3009	4009
330	20	D	7.5	12	0.045	4.3	10	110	210	310	2010	3010	4010
10 WVdc @ 85 °C — 7 WVdc @ 125 °C													
82	10	C	4.0	8	0.085	2.9	12	112	212	312	2012	3012	4012
100	10	C	5.0	8	0.075	3.0	14	114	214	314	2014	3014	4014
100	20	C	5.0	8	0.075	3.0	15	115	215	315	2015	3015	4015
120	10	C	6.0	8	0.070	3.2	17	117	217	317	2017	3017	4017
180	10	D	9.0	8	0.060	3.7	19	119	219	319	2019	3019	4019
220	10	D	10.0	10	0.055	3.9	21	121	221	321	2021	3021	4021
220	20	D	10.0	10	0.055	3.9	22	122	222	322	2022	3022	4022
15 WVdc @ 85 °C — 10 WVdc @ 125 °C													
56	10	C	4.0	6	0.100	2.6	24	124	224	324	2024	3024	4024
68	10	C	5.0	6	0.095	2.7	26	126	226	326	2026	3026	4026
68	20	C	5.0	6	0.095	2.7	27	127	227	327	2027	3027	4027
120	10	D	9.0	8	0.070	3.5	29	129	229	329	2029	3029	4029
150	10	D	10.0	8	0.065	3.6	31	131	231	331	2031	3031	4031
150	20	D	10.0	8	0.065	3.6	32	132	232	332	2032	3032	4032
20 WVdc @ 85 °C — 13 WVdc @ 125 °C													
27	10	C	2.5	5	0.145	2.2	34	134	234	334	2034	3034	4034
33	10	C	3.5	5	0.130	2.3	36	136	236	336	2036	3036	4036
33	20	C	3.5	5	0.130	2.3	37	137	237	337	2037	3037	4037
39	10	C	4.0	5	0.120	2.4	39	139	239	339	2039	3039	4039
47	10	C	4.5	6	0.110	2.5	41	141	241	341	2041	3041	4041
47	20	C	4.5	6	0.110	2.5	42	142	242	342	2042	3042	4042
56	10	D	5.5	6	0.100	2.9	44	144	244	344	2044	3044	4044
68	10	D	7.0	6	0.095	3.0	46	146	246	346	2046	3046	4046
68	20	D	7.0	6	0.095	3.0	47	147	247	347	2047	3047	4047
82	10	D	8.0	6	0.085	3.1	49	149	249	349	2049	3049	4049
100	10	D	10.0	8	0.075	3.3	51	151	251	351	2051	3051	4051
100	20	D	10.0	8	0.075	3.3	52	152	252	352	2052	3052	4052
35 WVdc @ 85 °C — 23 WVdc @ 125 °C													
22	10	C	4.0	4	0.160	2.1	54	154	254	354	2054	3054	4054
22	20	C	4.0	4	0.160	2.1	55	155	255	355	2055	3055	4055
27	10	D	4.5	4	0.145	2.4	57	157	257	357	2057	3057	4057
33	10	D	5.5	5	0.130	2.5	59	159	259	359	2059	3059	4059
33	20	D	5.5	5	0.130	2.5	60	160	260	360	2060	3060	4060
39	10	D	7.0	5	0.120	2.6	62	162	262	362	2062	3062	4062
47	10	D	8.0	5	0.110	2.7	64	164	264	364	2064	3064	4064
47	20	D	8.0	5	0.110	2.7	65	165	265	365	2065	3065	4065
50 WVdc @ 85 °C — 33 WVdc @ 125 °C													
5.6	10	C	2.2	3	0.300	1.5	67	167	267	367	2067	3067	4067
6.8	10	C	2.2	3	0.275	1.6	69	169	269	369	2069	3069	4069
6.8	20	C	2.2	3	0.250	1.6	70	170	270	370	2070	3070	4070
8.2	10	C	2.5	3	0.250	1.6	72	172	272	372	2072	3072	4072
10	10	C	2.5	3	0.230	1.7	74	174	274	374	2074	3074	4074
10	20	C	2.5	3	0.230	1.7	75	175	275	375	2075	3075	4075
12	10	C	3.0	3	0.210	1.8	77	177	277	377	2077	3077	4077
15	10	C	4.0	3	0.190	1.9	79	179	279	379	2079	3079	4079
15	20	C	4.0	3	0.190	1.9	80	180	280	380	2080	3080	4080
18	10	C	4.5	4	0.175	2.0	82	182	282	382	2082	3082	4082
22	10	D	5.5	4	0.160	2.3	84	184	284	384	2084	3084	4084
22	20	D	5.5	4	0.160	2.3	85	185	285	385	2085	3085	4085

TO ORDER: Indicate the prefix M39003/09 followed by the applicable MIL dash number.

Example: For M39003/09-0002; order CSR210002

Type CSR21 (MIL-C-39003/09) Solid Tantalum Capacitors

Notice and Disclaimer: All product drawings, descriptions, specifications, statements, information and data (collectively, the "Information") in this datasheet or other publication are subject to change. The customer is responsible for checking, confirming and verifying the extent to which the Information contained in this datasheet or other publication is applicable to an order at the time the order is placed. All Information given herein is believed to be accurate and reliable, but it is presented without any guarantee, warranty, representation or responsibility of any kind, expressed or implied. Statements of suitability for certain applications are based on the knowledge that the Cornell Dubilier company providing such statements ("Cornell Dubilier") has of operating conditions that such Cornell Dubilier company regards as typical for such applications, but are not intended to constitute any guarantee, warranty or representation regarding any such matter – and Cornell Dubilier specifically and expressly disclaims any guarantee, warranty or representation concerning the suitability for a specific customer application, use, storage, transportation, or operating environment. The Information is intended for use only by customers who have the requisite experience and capability to determine the correct products for their application. Any technical advice inferred from this Information or otherwise provided by Cornell Dubilier with reference to the use of any Cornell Dubilier products is given gratis (unless otherwise specified by Cornell Dubilier), and Cornell Dubilier assumes no obligation or liability for the advice given or results obtained. Although Cornell Dubilier strives to apply the most stringent quality and safety standards regarding the design and manufacturing of its products, in light of the current state of the art, isolated component failures may still occur. Accordingly, customer applications which require a high degree of reliability or safety should employ suitable designs or other safeguards (such as installation of protective circuitry or redundancies or other appropriate protective measures) in order to ensure that the failure of an electrical component does not result in a risk of personal injury or property damage. Although all product-related warnings, cautions and notes must be observed, the customer should not assume that all safety measures are indicated in such warnings, cautions and notes, or that other safety measures may not be required.

OBSOLETE